

ZP13 Industrial Enclosure

IP65

The ZP enclosure from Abtech is a durable and lightweight solution for industrial applications. Made from high-impact polycarbonate or ABS, it offers excellent protection against harsh environments while maintaining a sleek design.

- Ambient temperature range up to -40°C to +120°C
- Weather Resistant, up to IP65 Rated
- Versatile Applications – Ideal for electrical and instrumentation systems



Enclosure Information

| Product Reference | Width (mm) | Height (mm) | Depth (mm) | Weight (g) |
|-------------------|------------|-------------|------------|------------|
| EZP13 | 240 | 120 | 100 | 550 |
| EZP13ABS | 240 | 120 | 100 | 495 |
| EZP13CLEAR | 240 | 120 | 100 | 550 |
| EZP13ABSCLEAR | 240 | 120 | 100 | 495 |


CLEAR – Indicates enclosure is the clear lid variant.

Standard Specifications

| | | | |
|---------------------|----------------------------------|---------------------|--|
| Enclosure Material | Polycarbonate* or ABS (RAL7035). | | |
| Ingress Protection | IP65 to EN60529 | | |
| Service Temperature | Polycarbonate: -40°C to +120°C | ABS: -40°C to +65°C | |


*UL94-V0 Material available on request

Options

| Clear Lid Variant | | |
|---------------------|---|---|
| Lid Material | Polycarbonate or ABS (clear) |  |
| Ingress Protection | IP65 to EN60529 | |
| Service Temperature | Polycarbonate: -65°C to +130°C ABS: -40°C to +65°C | |

Accessories

| |
|--------------------------|
| Mounting Plate: Pertinax |
| Mounting Feet |
| External Hinges |

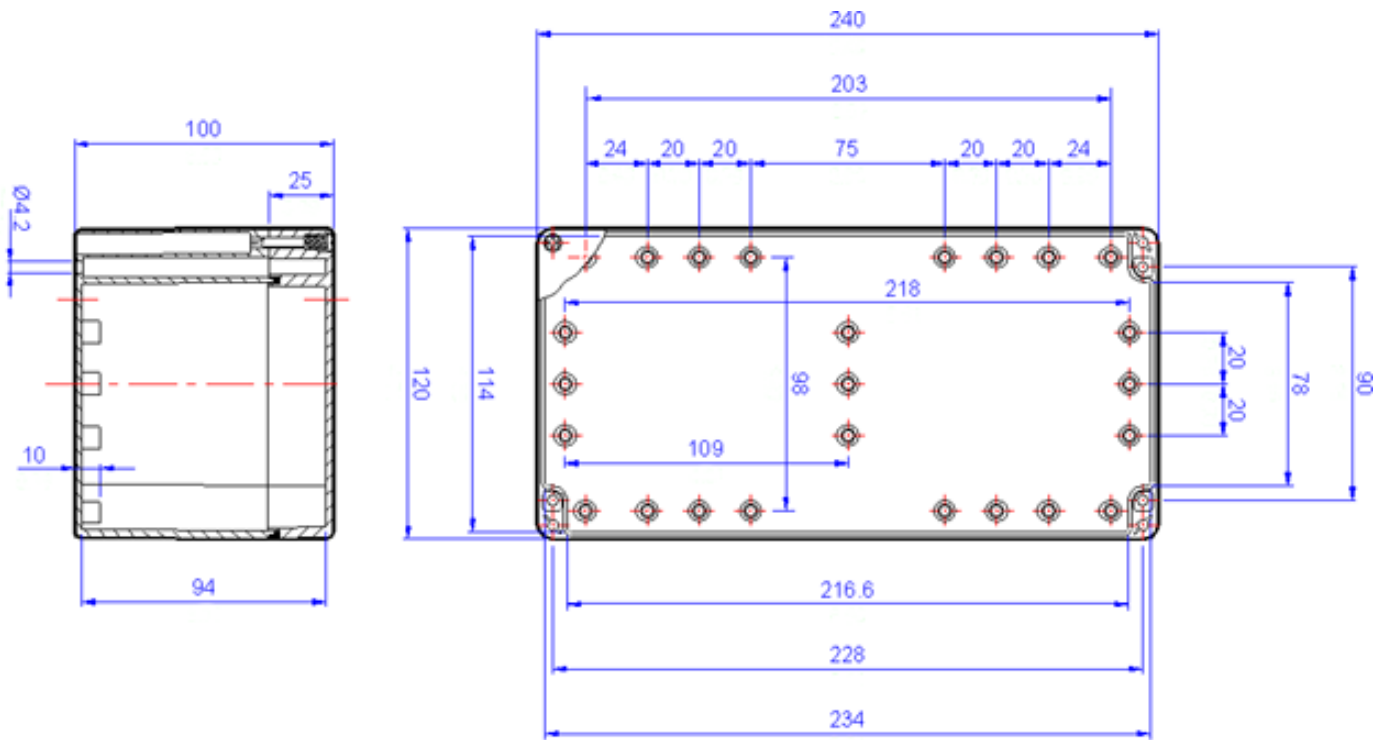

All dimensions are in mm.